



2013 RAM 1500

Tow Rating

Engine:	5.7L V8 HEMI	Transmission:	A6 65RFE
Drive:	2WD	Tire Size:	N/A
Cab:	CREW	Package:	SLT/OUTDOORSMAN/BIGHORN/LONE STAR (RAMBOX)
Bed:	5'7"	Wheel Base:	N/A
Axle Ratio:	3.00	Rear Wheels:	SINGLE

HOW MUCH CAN I TOW WITH A GOOSENECK?

Boasting about towing a heavy load is common in this day and age. It's the focus of nearly every truck commercial. But the answer to how much you can safely tow isn't always easy to find and there are many variables. Nonetheless, weight ratings are important to understand and follow.

Truck manufacturers give their trucks specific ratings after extensive testing. Tow ratings are based on the capacity of a truck's engine, transmission, and brakes to safely handle the weight of a loaded trailer. Truck manufacturers calculate

how much a truck can safely accelerate and stop before assigning a tow rating. For Gross Weight Ratings, the truck's tires, frame, and suspension must be able to bear the load. It's important to never exceed the ratings assigned by the truck, trailer, or hitch manufacturers for the specific equipment you are using.

Gooseneck hitches should be tested for strength and durability and rated according to SAE J-2638.

FINDING MANUFACTURER WEIGHT LIMITS

GCWR
12,100

Gross Combined Weight Rating (GCWR)

is the maximum allowable weight of the tow vehicle and the loaded trailer including all cargo and passengers.

GVWR
6,800

Gross Vehicle Weight Rating (GVWR)

is the maximum allowable weight of the fully loaded vehicle.

Tow Rating
6,600

Max Tow Rating

Sometimes called maximum towing capacity, is the maximum allowable weight that a vehicle can tow.

VTWR
1,650

Vertical Towing Weight Rating (VTWR)

is the downward force that the tongue of the trailer applies to the hitch of the tow vehicle. Your hitch should be no more than 25% of your truck's Tow Rating.

FINDING YOUR ACTUAL WEIGHTS

Take your loaded truck and loaded trailer to a scale at a truck stop, quarry, or material supply center. For a small fee you can weigh your tow vehicle and trailer on their scale.



1. Find your GVW (Gross Vehicle Weight)


Weigh just your truck with a full tank of gas, all your passengers and items in the cab and truck bed with your trailer loaded and attached, but not on the scale.

6,800

MUST BE MORE THAN

GVWR

your GVW

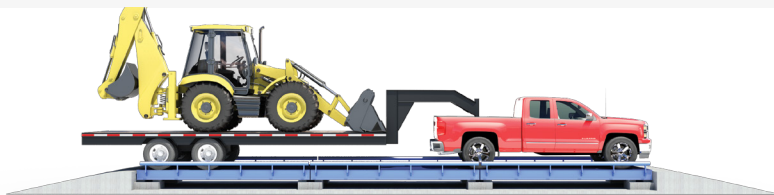

12,100

MUST BE MORE THAN

GCWR

your GCW

2. Find your GCW (Gross Combined Weight)

Weigh your fully loaded truck and trailer including all cargo, a full tank of gas and passengers.

3. Find your Towing Weight

Weigh your loaded truck without the trailer attached. This is your truck weight.

Subtract your **Truck Weight** from your **GCW**. This is your towing weight.



$$\boxed{} - \boxed{} = \boxed{}$$

your GCW

your Truck Weight

your Towing Weight



6,600

MUST BE MORE THAN

Max Tow Rating

your Towing Weight

4. Find your VTW (Vertical Tow Weight) also known as Tongue Weight.

Subtract your **Truck Weight** from your **GVW**.

$$\boxed{} - \boxed{} = \boxed{}$$

your GVW

your Truck Weight

your VTW



1,650

MUST BE MORE THAN

VTWR

your VTW

IMPORTANT!

Even though you may be under your vehicle's Max Towing Rating, when your Gross Vehicle Weight (GVW) goes up, (more passengers, more cargo) your ability to tow the Max Towing Rating may not be possible, because: **the Gross Combined Weight Rating (GCWR) must not be exceeded.**